
AutoSeal® FD 2096

PRODUCTION PRESSURE SEALER



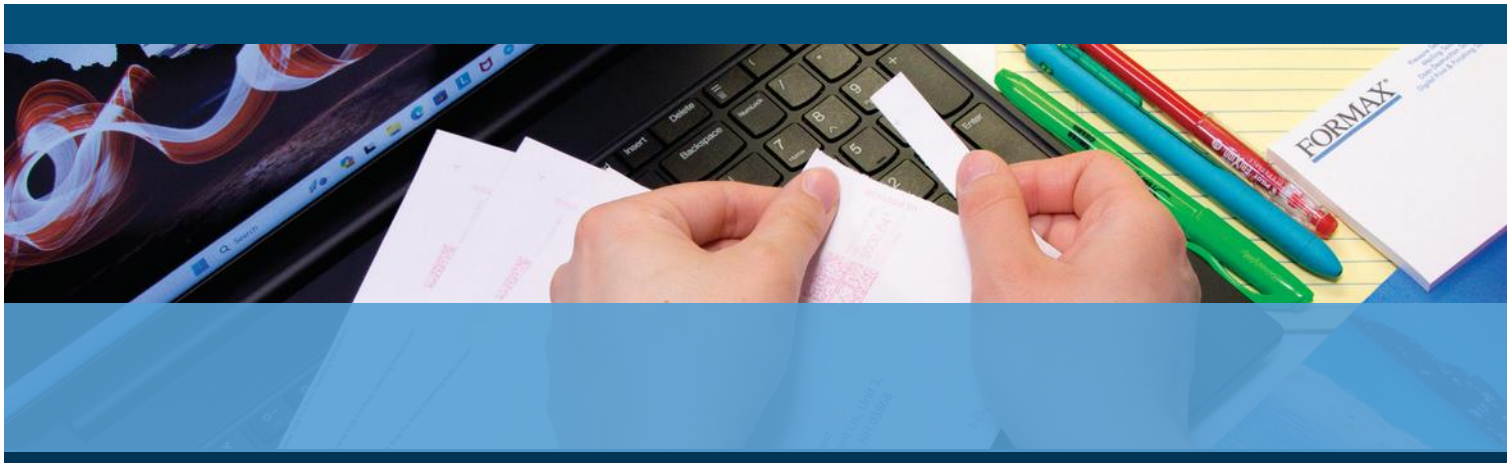

Automated Mailroom
6201 Johns Road, Ste 12
Tampa, FL 33634-4434
(877) 870-6805 – (813) 870-6805
AutomatedMailroom.com

- Bottom-suction air feed system
- Processes up to 30,000 forms per hour
- Handles forms up to 17” long
- Heavy duty construction
- Adjustable 17” ball transport deck

FORMAX®

www.formax.com

Local Dealer:

The **AutoSeal® FD 2096** uses patented pressure seal technology to efficiently process cut-sheet forms at speeds of **up to 30,000 forms per hour.** Its **bottom-suction air-feed system** provides accurate feeding and allows for **continual loading** of forms, dramatically reducing down time. Set-up is quick and easy with **rugged metal fold pates**, clearly marked with standard and metric markings. The sealing unit utilizes an **adjustable 17" 8-ball transport deck** for a smooth, transition from the fold rollers into the sealer. Features include **user-friendly operator controls**, **sound-dampening fold plate** covers for quieter operation, **rugged locking casters**, and a **high-capacity 24" output conveyor** which is collapsible for convenient storage.




User-Friendly Controls
On/Off switch and simple speed control knob



Rotating Air-Suction Drum
Reliably separates sheets for accurate feeding



Resettable Counter
6-digit resettable LED counter to keep track of processed forms

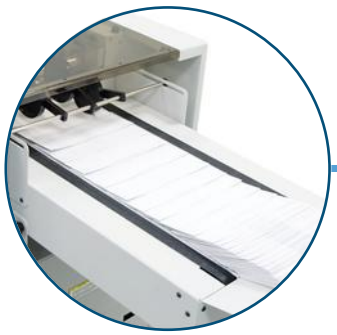

24" Outfeed Conveyor
Integrated conveyor is collapsible for convenient storage



Sound-Reducing Insulation
Fold plates are covered and insulated to reduce noise

STANDARD FEATURES

- Top-loading bottom air feed
- Variable speed control
- Heavy duty fold rollers
- Adjustable 17" 8-ball transport deck
- Rugged fold plates
- Precision ground clutching 4-roller system
- Fully-enclosed air-feed pump
- Rotating air suction drum
- Casters for easy transport
- 7-point quick-release fold stops
- 24" integrated outfeed conveyor
- Adjustable stacker wheels
- User-friendly adjustments
- Resettable 6-digit LED counter
- Insulated fold plates for noise reduction
- Infrared fault detection
- Plexi-cover with safety interlock
- Static eliminator brush

OPTIONS

402 Series Jogger: Reduces static electricity and aligns forms for proper feeding

V-Stack36i Stacker: Vertically stacks up to 22" of folded documents, making them easier to unload

Center Slitter: For applications including 2-up postcards

SPECIFICATIONS

Hopper Capacity	Up to 350 sheets 24#
Speed	Up to 30,000 forms per hour
Usage	Mid-Volume Production
Form Size	Up to 12" W, up to 17" L (305mm, 432mm)
Dimensions (Conveyor Extended)	86" L x 28" W x 42" H (219 x 71 x 107cm)
Dimensions (Conveyor Closed)	64" L x 28" W x 42" H (163 x 71 x 107cm)
Weight	450 lbs (204kg)
Power	120V 60Hz, 30Amp, single phase
Power Plug	NEMA L5-30P